


# NIPPON KOEI



# BSC (Biological Soil Crust) Method

One of the vegetation recovery methods in Japan to prevent slope erosion and facilitate the vegetation intrusion by seeds flying from the surrounding areas

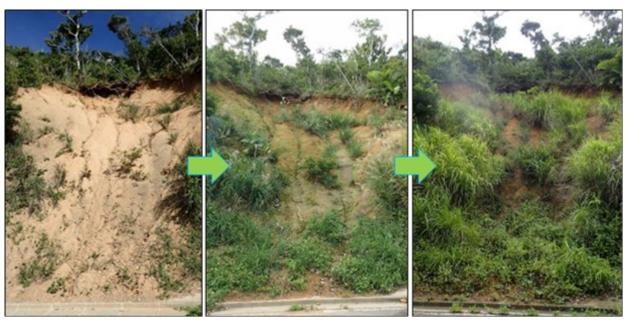

### Hazard

Land Slide

### Solution Purpose

**Prevention & Mitigation Recovery** 

#### Solution Theme

Research & Investigation Infrastructure Technology Building Technology Eco Infrastructure


### Technology Subject

Technical Research & Development Sabo Road Railways Facility for Disaster Prevention Ecosystembased Infrastructure

## **Advantages**

By intruding the existing vegetative species, adequate and suitable vegetation will be recovered, which are suitable for the target areas. As the soil algae used in this method inhabit all over the world: which is called a cosmopolitan species, the environmental impact to the indigenous species. Due to clonal propagation, there is no gene disruption. Implementation costs of the BSC method are cheaper in Japan compared to ordinal natural vegetation intrusion acceleration methods; e.g. vegetation mats/ sheets without seeds, and easier implementation methods, without additional works, such as slope leveling

# Solution Illustrated

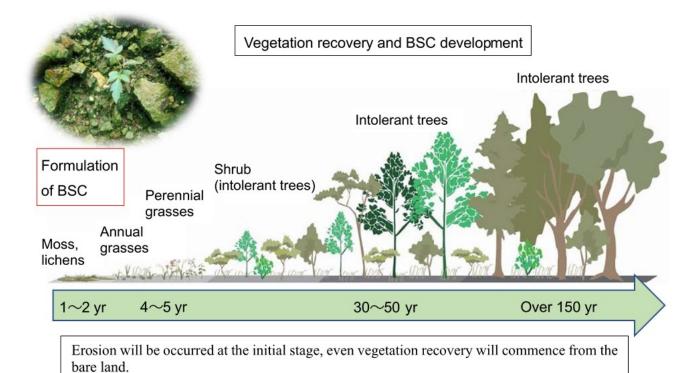

By formulating of BSC, erosion prevention effects will be increase, resulting in promotion of

(National Institute for Land and Infrastructure Management (January 2013))"

vegetation intrusion.

Source: Modified from "Guideline for slope vegetation works in consideration of regional biodiversity conservation

### Background

BSC (Biological Soil Crust) is a sheet-like colony of soil microbes formulated by soil particles and fractures on the soil surface bound by the filamentous bacterium, soil algae, lichens, and moss. For the sites by ordinal natural vegetation implementation methods, the implemented areas are prone to be eroded and damaged by flowing water. Comparing with it, as the soil algae used in the BSC method well develop and grow especially along the water-flowing parts (i.e. rills, gullies), such algae in the BSC method can prevent from the expansion of erosion.

## **Exposition of the Solution**


- Obtained a patent right as Soil Erosion Prevention Method: Patent right No. 3718203 and No. 4412628 (Public Works Research Institute, Japan/ Nippon Koei Co., Ltd.)
- PCT International Applications: July 2019 (by Nikken Sohonsha Corporation/ Nippon Koei CO., Ltd.)
- Production of BSC-1 material: Nikken Sohonsha Corporation






BSC material (left) Package of BSC-1 (right) BSC-1

- Hydro-seeder with pump is used in Japan.
- Water pump can be used for spraying.
- ♦ No slope levelling
- ♦ No lath installation

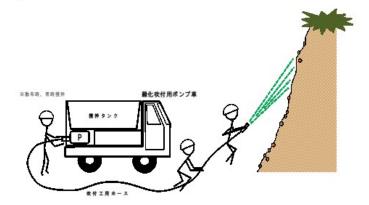

# **Achievements of Examples**

Slope failure along the forest road inside the Yambaru National Part, Okinawa Prefecture (in collaboration with Okinawa Prefectural Government Office)

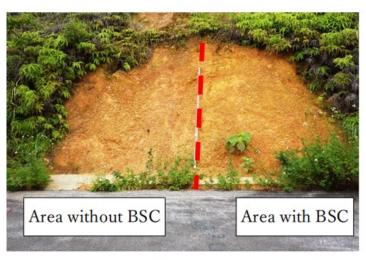



# **Corporate Profile**

# Nippon Koei Co., Ltd.

5-4 Kojimachi, Chiyoda-ku, Tokyo 102-8539, JAPAN

**℃** Tel.: +81-3-5276-3596

☑ E-mail: int.a@gx.n-koei.co.jp